



### FEATURES:

- Flat T Bend have three width dimensions and are produced equally.
- There are holes in the Flat T Bend base.  
The cable tray is fixed with M8x15 bolts and nuts to coincide with these holes.
- Width dimensions can be produced differently.
- **Example:** In special productions, the dimensions must be clearly specified.  
It can be produced as X:75mm, Y:100mm, Z:50mm, the size expression should be 75/100/50 when defining the product.  
These products cannot be changed and returned as they will remain fixed after production.  
In special productions, the code is specified according to the larger size.
- It can be produced in required thickness from 0.80mm to 2.00mm.



### DESCRIPTION:


#### Product Code

**DM-NTD7515**

Height (h)  
Width (w)  
Light duty cable tray T Bend (NTD)


### DIMENSIONS:

Width (w) : 75  
Thickness (t) : 0,8  
Height (h) : 15



#### How to install?

When the cable tray coincides with the holes on top of the flat T bend it is fixed with m8x15 bolts and nuts.

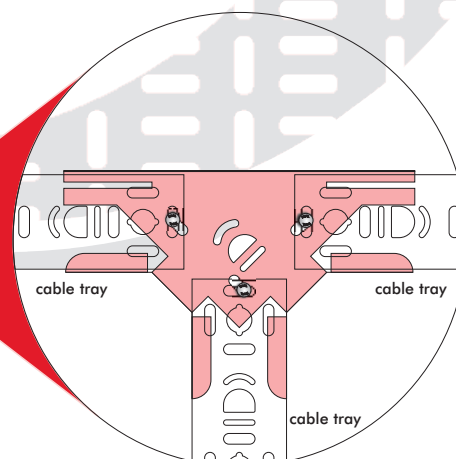

### COATING

**PG** Pre-Galvanised Steel

**HDG** Hot - Dip Galvanised Steel

**EPC** Electrostatic Powder Coating

**SS** Stainless Steel

Prices vary according to the type of coating in the offer. You must specify the type of coating in your offer list.